

ARTEMES

arte[s] me[nzioni]s - The Art of Measuring
Power & Energy



Power Analyser
AM-5-P

Power Analyser AM-5-P



- PQ + PMU + PFR + PM + DFR
- 24 bit resolution
- 20 ksamples/sec. events recorder and data-streaming
- 4 voltages and 4 currents
- measuring and evaluation via web browser
- **ARTEMES CLOUD** interface
- display optional

The ARTEMES Power Analyzer AM-5-P is a powerful 24-bit resolution device that combines the requirements of energy measurement and power quality analysis with the very latest data transmission technology. In addition to the possibility of using web interface such as smartphone or PC, all post-processing activities via the web - as a browser application directly on the device, on a special server or the ARTEMES CLOUD - are available as well.

Thermal energy analysis for e.g. ISO 50001 reports are included in the basic version. The PQ extension option also provides power quality analysis in accordance with the EN 50160 standard. As a high-end solution, the PMU option even offers full phasor measurement functionality for GPS synchronous measurements at different locations.



Energy - ISO 50001
Power Quality EN 50160, IEC 61000-2-4
IEC 61000-4-30 Class A
PMU - phasor measurement unit
web technology for operation and evaluation via web browser

Measurement Functions

Overview - Online

representation of the data over time, as a vector diagram and as numerical values

recording mode or simulation mode, RMS, AVG, min, max (10 period values, adjustable)

RMS, AVG (period values, adjustable overlapping and duration)

U, I, P, Q, S, D, PF, unbalance

flicker

IEC 61000-4-15: 2012 Class F1

frequency

symmetrical components

IEC 61000-4-30: 2008 Class A



Oscilloscope - Real-Time

real-time oscilloscope on the web browser

voltage and current

selectable scaling left or right



FFT - Real-Time


voltage, current, power, phase angle

phase and phase voltages

bar chart representation and numerical values

IEC 61000-4-7: 2009 Class 1

interharmonics

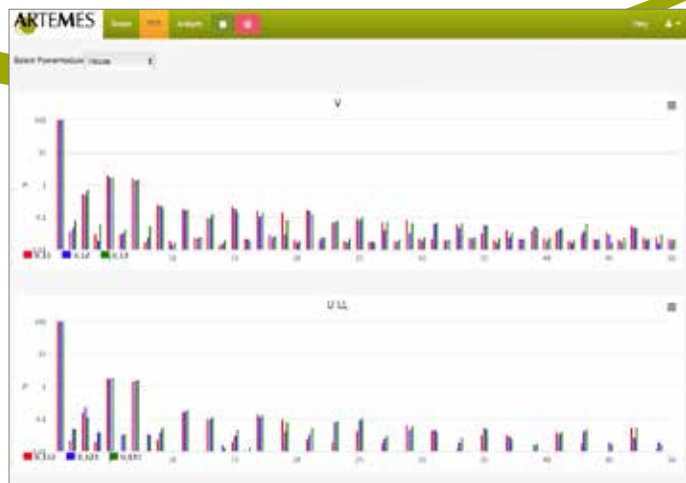



Dynamic Reports

- diagrams of any channels
- ready-made templates
- reduction and enlargement possible



Static Reports

- report generator for defining reports or ready-made reports
- EN 50160: 2011, Energy (ISO 50001)
- IEC 61000-2-4: 2002
- any diagrams possible
- event statistics



Events Recorder

- transient recordings (TFR)
- fault records (DFR)
- event records EN 50160: 2011
- IEC 61000-4-30: 2008
- scaling: possibilities to enlarge or reduce
- statistical ratings: DisDip/Unipede, CBEMA, events according to EN 50160: 2011

Technical Data

		AM-5-P	AM-5-PR
voltage inputs		4	4
	range	+/- 400V	+/- 400V
	accuracy (on value, 5-100% of range)	0,1%	0,1%
current inputs		5 * 5 A direct	5 * 2 V
	direct current input	AC + DC	-
	range	5A	-
	accuracy	0,5%	-
	clamp 5A	-	AC
	range	-	5A
	accuracy	-	0,5%
	Rogowski coil	-	AC
	range	-	10 / 100 / 1k / 10 kA
	accuracy	-	1%
	other clamps (https://store.artemes.org/zubehoer/stromsensoren/)	on request	on request
digital inputs		8	8
digital outputs		4	4
measurement parameters	resolution	24 bit	24 bit
	sampling rate	up to 20 kSamples/sec. per channel	up to 20 kSamples/sec. per channel
	bandwidth	10kHz	10kHz
measurement values	phase voltages, neutral voltage	✓	✓
	line voltages	✓	✓
	phase currents, neutral current	✓	✓
evaluation online	web interface	✓	✓
	recorder - diagram and actual values	✓	✓
	Scope, FFT	✓	✓
	FFT IEC 61000-4-7	Option -PQ, -PMU	Option -PQ, -PMU
	PMU	Option -PMU	Option -PMU
data processing	flexible report generator on web	✓	✓
	EN 50160	Option -PQ	Option -PQ
	IEC 61000-2-4 class 1,2,3	Option -PQ	Option -PQ
	ISO 50001 energy report	✓	✓
data storage	internal SD	32 GB	32 GB
	ARTEMES server	licence included (max 3 measurement clients)	licence included (max 3 measurement clients)
	ARTEMES CLOUD	option: AM-10-CLOUD	option: AM-10-CLOUD
communication ports	USB 3.0	1	1
	LAN	1	1
	WLAN	✓	✓
	GPS	Option -PMU	Option -PMU
EMC	IEC 61326-1 industry	✓	✓
	IEC 61000-4-4 surge, IEC 61000-4-5 burst	4 kV	4 kV
	isolation (AC, 1 min)	4 kV	4 kV
safety	IEC 61010-1	✓	✓
dimensions	width x height x length	144 / 144 / 70 mm	144 / 144 / 70 mm
power supply	AC - V/f	85-264 VAC / 47-63 Hz	85-264 VAC / 47-63 Hz
power consumption	VA	12 VA	12 VA
weight	kg	1 kg	1 kg
temperature range	operation	-20°C to +60°C	-20°C to +60°C
	storing	-20°C to +80°C	-20°C to +80°C
order options			
AM-5-P-PQ	PQ-Power Quality Function Toolbox for FFT, Flicker, Unbalance, EN 50160, IEC 61000-2-4, for AM-5-P	software option	software option
AM-5-P-PMU	PMU - phasor measurement add-on including software according IEEE C37.118 and GPS input, for AM-5-P	option only available with new instrument	option only available with new instrument
AM-5-P-DC	DC power supply instead of AC, without battery, for AM-5-P	option only available with new instrument	option only available with new instrument
AM-Cloud-1	rent cloud space per month on ARTEMES server	online option	online option

Order Number

	article	order number	description
AM-5	AM-5-P	550-AM-5-P	Panel mount power meter with PFR functionality
	AM-5-PQ	550-AM-5-PQ	Panel mount power meter with PQ functionality
	AM-5-PMU	550-AM-5-PMU	Panel mount power meter with PMU functionality
	AM-5N-P	550-AM-5N-P	Panel mount power meter with PFR functionality, without display
	AM-5N-PQ	550-AM-5N-PQ	Panel mount power meter with PQ functionality, without display
	AM-5N-PMU	550-AM-5N-PMU	Panel mount power meter with PMU functionality, without display
	AM-5R-P	550-AM-5R-P	Panel mount power meter with PFR functionality, with Rogowskicoils
	AM-5R-PQ	550-AM-5R-PQ	Panel mount power meter with PQ functionality, with Rogowskicoils
	AM-5R-PMU	550-AM-5R-PMU	Panel mount power meter with PMU functionality, with Rogowskicoils
	AM-5RN-P	550-AM-5RN-P	Panel mount power meter with PFR functionality, without display, with Rogowskicoils
	AM-5RN-PQ	550-AM-5RN-PQ	Panel mount power meter with PQ functionality, without display, with Rogowskicoils
	AM-5RN-PMU	550-AM-5RN-PMU	Panel mount power meter with PMU functionality, without display, with Rogowskicoils
	AM-5-DC	550-AM-5-DC	DC Supply Option for AM-5 instruments, to order only with new instruments
AS	AS-Server-light	550-AS-Server-light	ARTEMES server light for up to 4 measurement units (included in AS-Basic)
	AS-Server	550-AS-Server	ARTEMES Server for more than 4 measurement units, web-based analysis tool for ARTEMES measurement instruments, for Windows Server, Linux on request
	AS-Topo	550-AS-Topo	ARTEMES topological view for control centres (add-on to the ARTEMES server)
	AS-Cloud-light	550-AS-Cloud-light	using the cloud for 6 months, for new instruments only (included in AS-Basic)
	AS-Cloud	550-AS-Cloud	monthly rent for the cloud server; The cloud server is a virtual server in the internet on which you can store and analyse your data, secured by VPN. The software corresponds to the ARTEMES server technology.
	AS-Modbus	550-AS-Modbus	ARTEMES driver for AS-Basic: Modbus (TCP and serial)

Measurements for Power Applications

System Integration and Monitoring Solution

convenient generation
of reports

data compression and data base solutions
for easy and individual use

cloud solutions for continuous and
distributed measurement tasks

automated test sequences
for repeated testings

ARTEMES
www.artemes.org

energy management systems
for commerce and industry

load profile measurings and
multi-channel power analyses

power quality analyses according
to defined standards

qualification of power plants
with renewables

software and hardware solutions
for individual test bench systems

ARTEMES GmbH
Hauptplatz 105
A-8552 Eibiswald
AUSTRIA

phone +43 3466 42 071
fax +43 810 9554 069 389
sales@artemes.org
www.artemes.org

